




IndiNature®

www.indinature.co
info@indinature.co

IndiTherm®

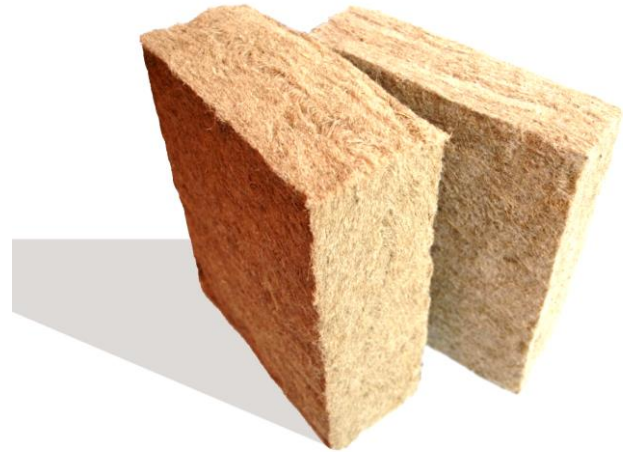

Declaration of Performance

	Standard	Performance	Notes
Durability	BS 5250:2011 + A1:2016	No physical transformation or loss of thermal performance.	Code of practice for control of condensation in buildings. Product exposed to extreme T and RH in climate chamber.
Thermal Conductivity	BS ISO 9869 - 1:2014	0.040 W/mK	Measured thermal conductivity
Vapour Permeability	BS 5250:2011 + A1:2016	2	Code of practice for control of condensation in buildings
Fire Rating	BS EN 13501-2	E	Euroclass fire rating.
Bulk Density		45 kg/m ³	
Specific Heat Capacity		2100 J/(kg.K)	Proxy metric based on measured thermal conductivity, density and comparable materials.
Quality Management System	ISO 9001 v2015		Up to date certification at our current manufacturing plant.